

FIG. 1 is a perspective view of a first embodiment of a device. The device includes a main body 100, a base 18, and a cylindrical component 16. A shaft 20(26) is shown passing through the cylindrical component 16, with a flange 22 and a pin 22a. A dashed line A indicates a cross-sectional view. Other components labeled include 12, 17, 17a, 25, 30, and 30.

[illegible][illegible]

FIG.5A


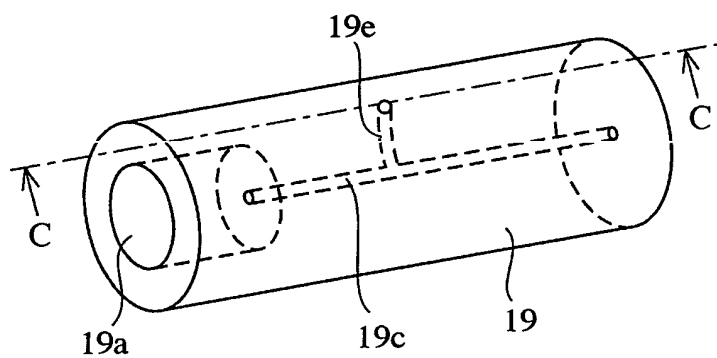


FIG.5B

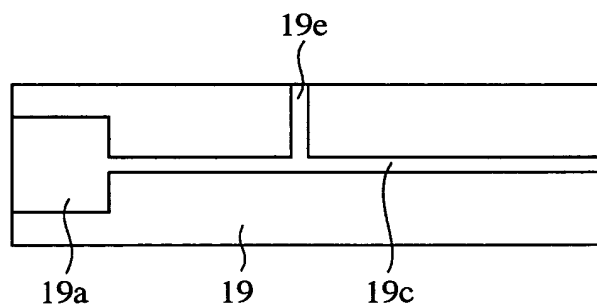

204020 T988800T 10086851 030402

FIG.6

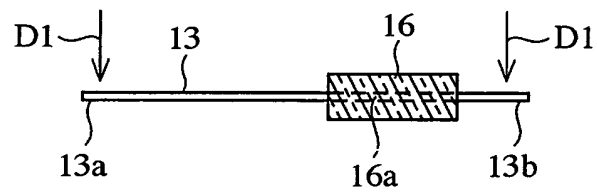


FIG.7

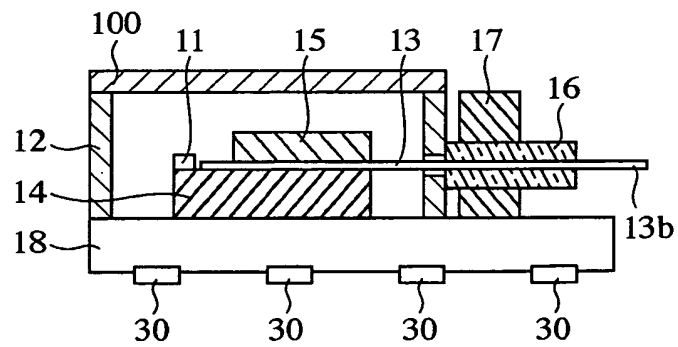


FIG.8

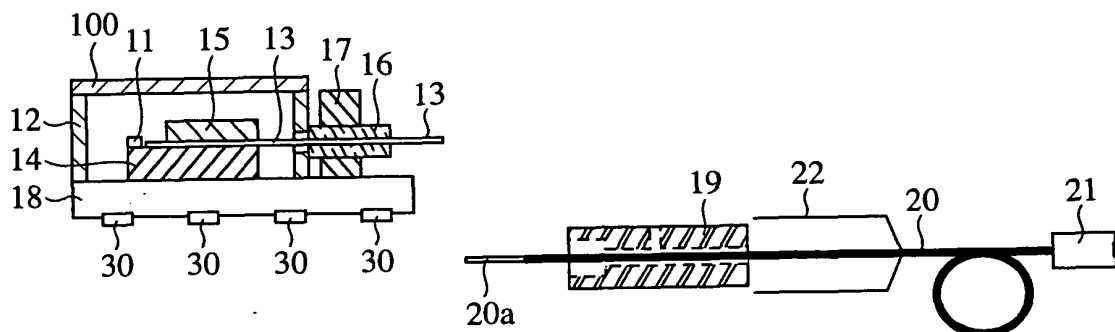


FIG.9

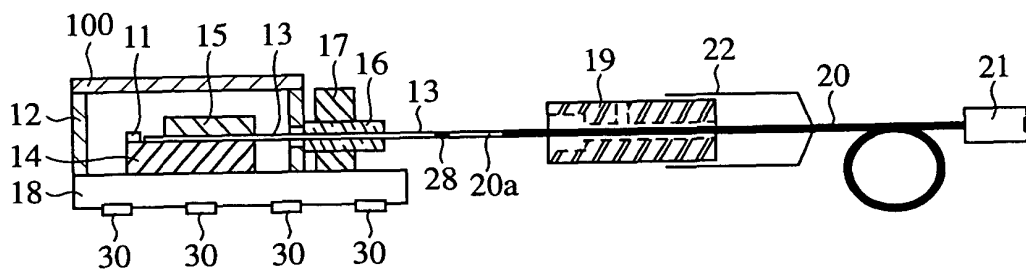


FIG.10

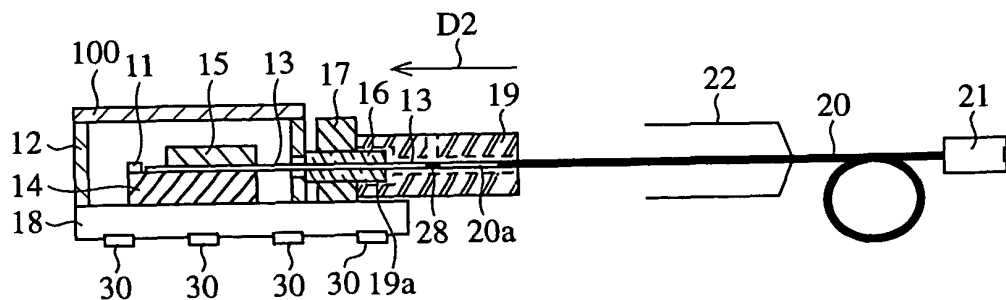


FIG.11

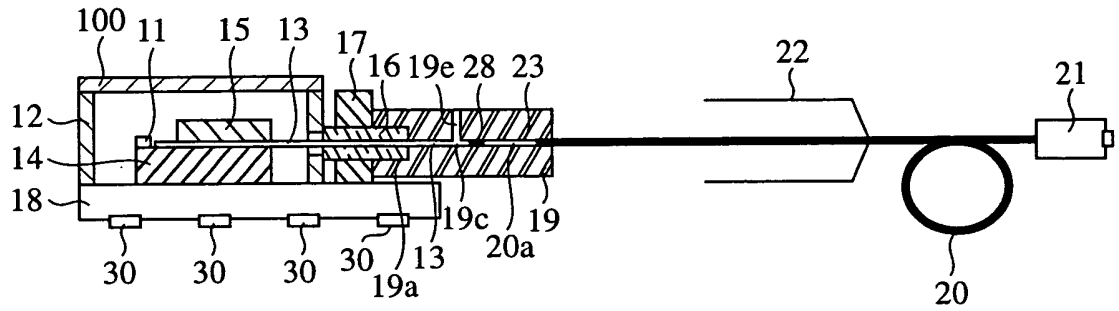


FIG.12

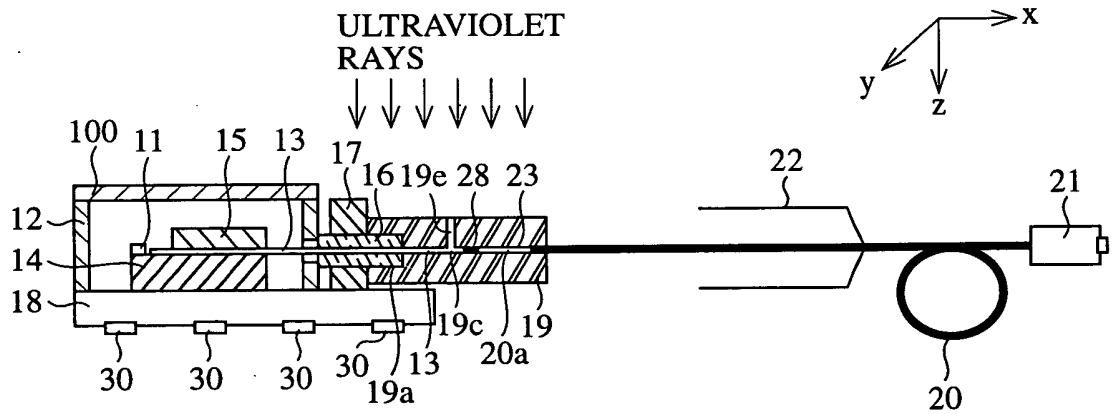


FIG.13

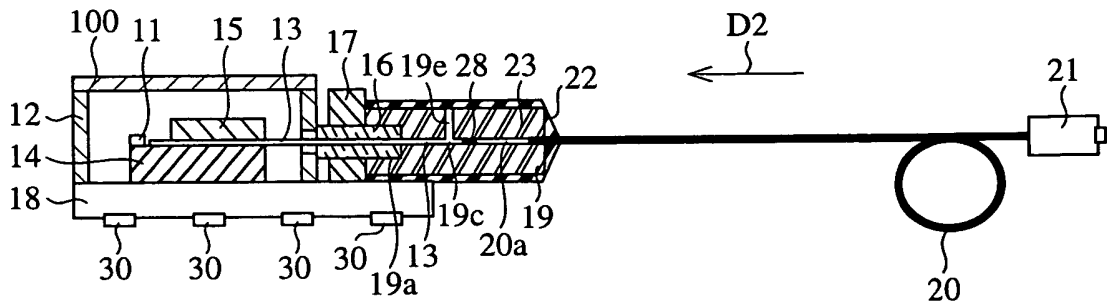


FIG.14


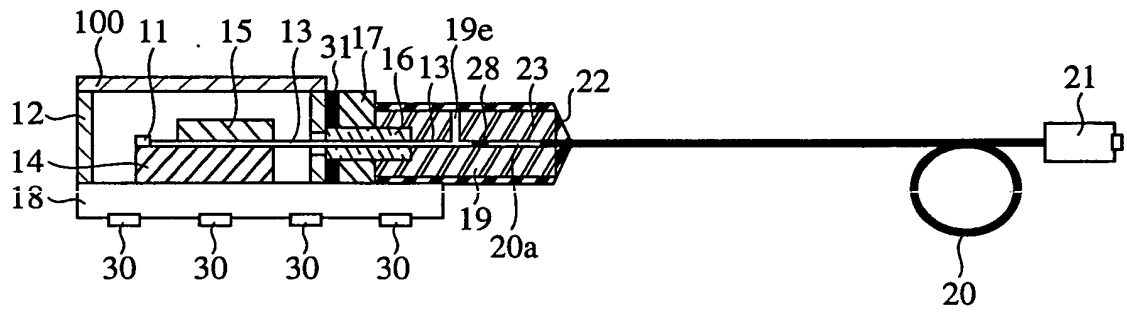


FIG.15

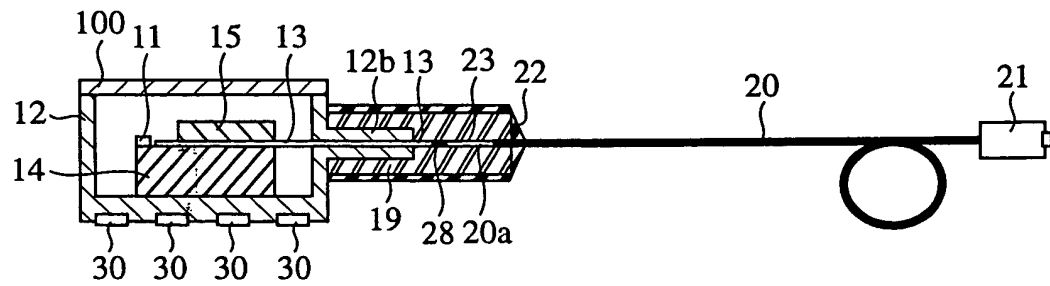

204020 "T 989800T 1008661.030402

FIG.16

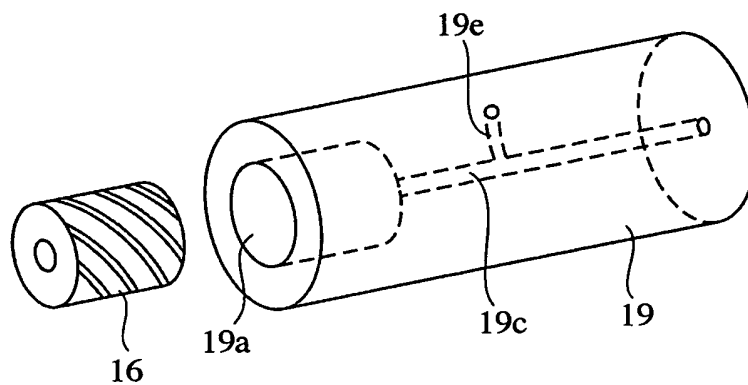


FIG.17

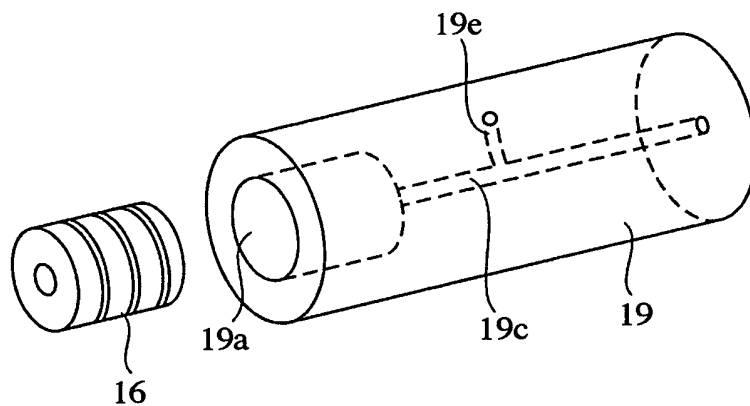


FIG.18

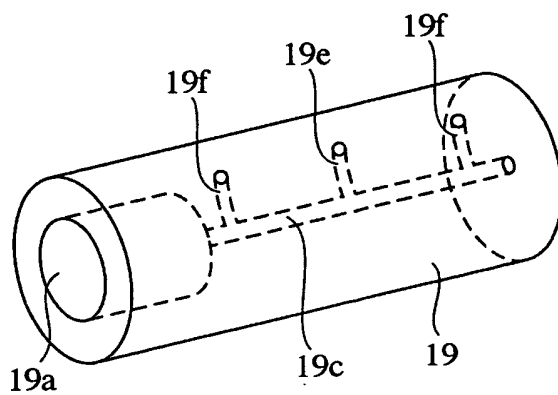


FIG. 19

